


Stainless Steel

Hollow Pin Chain C Style



Hollow Pin Chain **C Style**

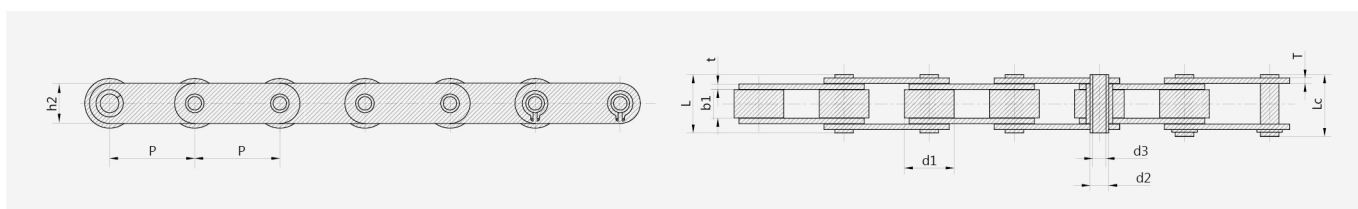

Chain No.	Pitch P [mm]	Roller diameter d1 max [mm]	Width between inner plates b1 min [mm]	Pin diameter d2 max [mm]	Pin diameter d3 min [mm]	Pin length L max [mm]	Pin length Lc max [mm]	Innerplate depth h2 max [mm]	Plate thickness T max [mm]	Breaking load Q min [kN/lbf]	Weight per meter q [kg/m]
C2042HPSS	25.40	15.88	7.85	5.63	4.00	16.5	17.6	12.0	1.50	7.7/1750	0.79
C2052HPSS	31.75	19.05	9.53	7.22	5.12	20.5	21.8	15.0	2.03	14.3/3250	1.27
C2062HPSS	38.10	22.23	12.70	8.31	6.00	25.8	26.8	17.0	2.42	16.8/3818	1.74
C2082HPSS	50.80	28.58	15.75	11.40	8.05	32.4	33.8	24.0	3.25	35.0/7955	2.86
C2042H-HPSS	25.40	15.88	7.85	5.63	4.00	18.8	19.9	12.0	2.03	7.7/1750	0.96
C2052H-HPSS	31.75	19.05	9.53	7.22	5.12	22.1	23.4	15.0	2.42	14.3/3250	1.46
C2062H-HPSS	38.10	22.23	12.70	8.31	6.00	29.2	30.2	17.0	3.25	16.8/3818	2.02
C2082H-HPSS	50.80	28.58	15.75	11.40	8.05	36.2	37.6	24.0	4.00	35.0/7955	3.30