


CA Type Steel Agricultural Chain

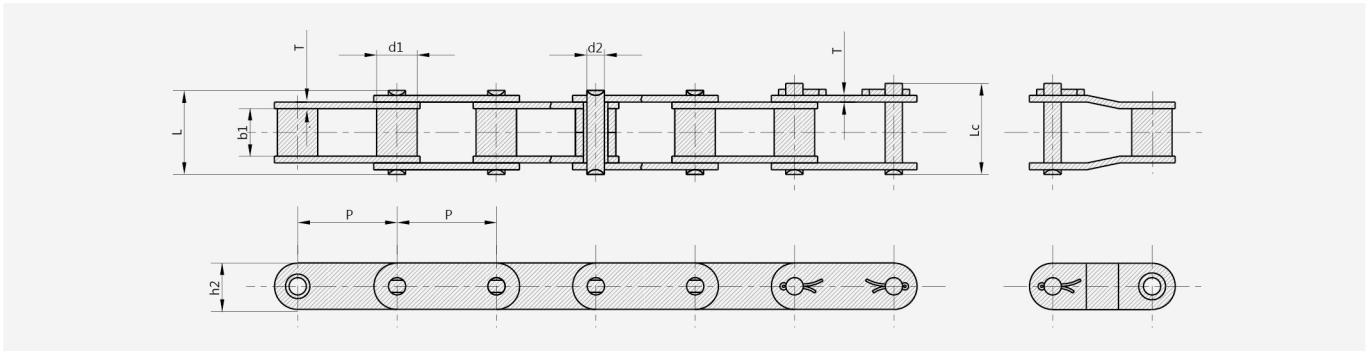

Chain No.	Pitch P [mm]	Roller diameter d1 max [mm]	Width between inner plates b1 min [mm]	Pin diameter d2 max [mm]	Pin length L max [mm]	Pin length Lc max [mm]	Plate dimension h2 max [mm]	Plate dimension T max [mm]	Ultimate tensile strength Q min [kN/lbf]	Average tensile strength q [kN]	Weight per meter q [kg/m]
CA550	41.40	16.87	19.81	7.19	35.0	38.0	19.30	2.80	39.10/8886	51.2	1.94
CA555V	41.40	16.80	19.05	8.28	36.1	39.1	22.00	3.00	55.00/12499	68.7	2.24
CA555	41.40	16.87	12.70	7.19	29.1	32.0	19.30	3.10	39.10/8886	56.0	1.72
CA557	41.40	17.78	20.24	8.00	37.4	40.6	23.10	3.10	55.61/12639	74.3	2.60
CA620	42.01	17.91	24.51	7.19	41.8	45.2	20.20	3.25	39.10/8886	55.1	2.35
CA2060H	38.10	11.91	12.70	5.94	29.2	31.6	18.00	3.25	31.10/6996	40.5	1.45
CA2063H	38.10	11.89	12.70	5.94	29.4	34.2	19.30	3.25	31.28/71.9	40.5	1.65
CAE44151	28.575	15.88	16.20	7.92	33.5	36.9	22.20	3.25	58.80/13363	64.5	2.73
38.4R	38.40	15.88	19.05	6.92	33.4	36.3	17.30	2.50	33.00/7480	41.2	1.70
38.4V	38.40	15.88	18.00	6.92	34.8	37.8	17.30	3.00	40.00/9091	50.0	1.83
CA624	38.40	15.88	19.05	8.28	36.1	39.1	20.50	3.00	50.00/11363	62.5	2.17
S55H	41.40	17.78	22.00	9.00	39.5	43.3	23.00	3.00	55.00/12633	72.6	6.94
CA2050	31.75	10.16	9.40	5.08	20.7	22.2	15.09	2.03	22.20/5045	28.1	0.78
CA2060	38.10	11.91	12.57	5.94	25.9	27.7	18.00	2.42	31.80/7227	36.8	1.12
CA550HD	41.40	16.66	19.48	8.28	36.8	40.3	19.81	3.10	39.11/8886	50.8	2.16
CA550R	41.40	16.87	19.80	7.19	36.3	39.3	19.30	3.10	57.70/13113	61.5	2.20